




Flag-Extender™ Assembly Drawing

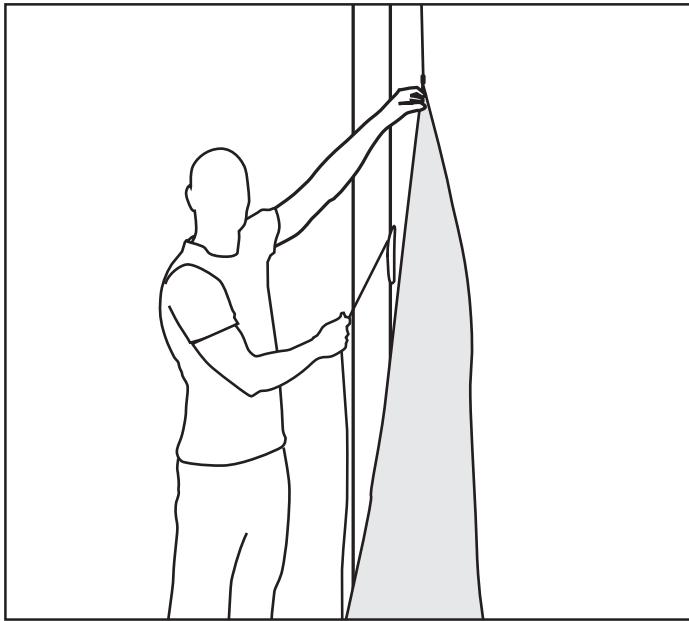


- ① Attach the elastic rope to the bottom of the flag. Fasten one end of the halyard to the top corner and the other end to the bottom end of the elastic rope. Hoist the flag to a level where you can still reach its upper edge.

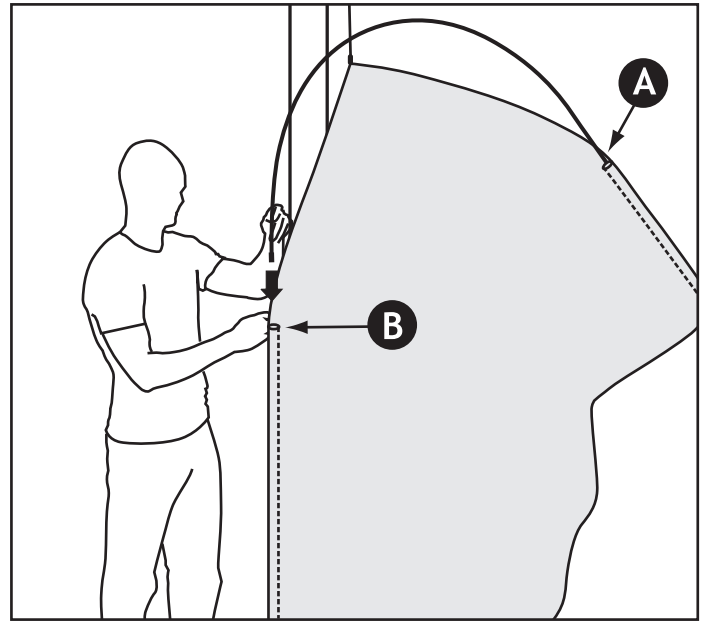

- ② On the edges of the flag there are two pockets.
Push one end of the flexible rod to the bottom of pocket A.
Bend the rod and push its other end to the bottom of pocket B.

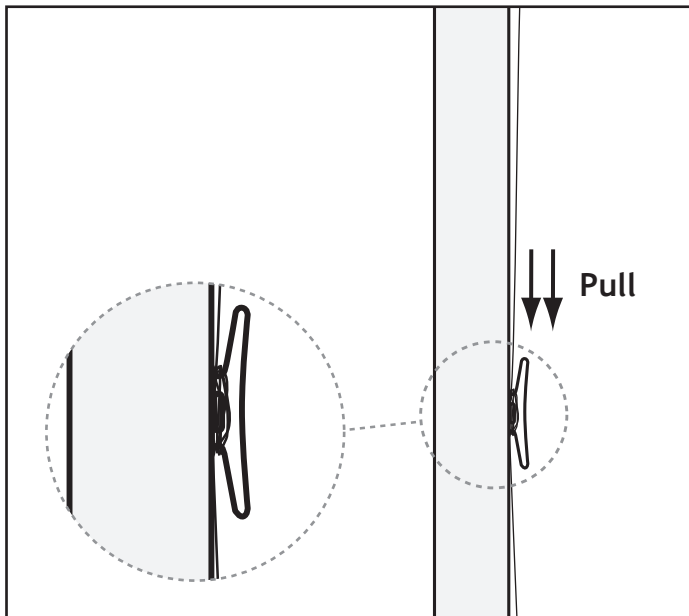

- ③ Hoist the flag in the usual manner. **Pull the halyard firmly before it is tied off.**

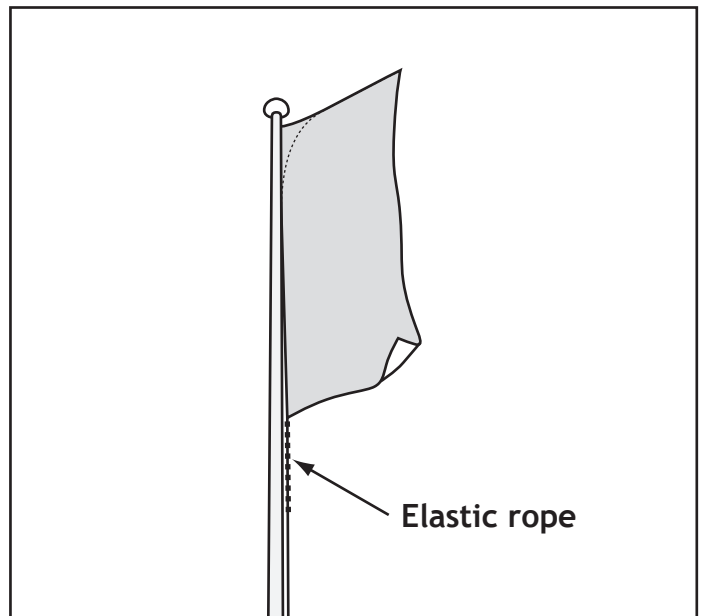

- ④ The elastic rope ensures that the halyard remains tight so that the flag does not droop. The flag now flies correctly.